

Docket No.: 44239-069

UTILITY PATENT APPLICATION
UNDER 37 CFR 1.53(b)

JC714 U.S. PTO
09/589109
06/08/00

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, DC 20231
Sir:

Transmitted herewith for filing is the patent application of:

INVENTOR: Yuusuke NAKANO
FOR: IMAGE PROCESSING APPARATUS, IMAGE PROCESSING METHOD,
AND RECORDING MEDIUM RECORDED WITH IMAGE PROCESSING
PROGRAM TO PROCESS IMAGE TAKING INTO CONSIDERATION
DIFFERENCE IN IMAGE PICKUP CONDITION USING AAM

Enclosed are:

- ☒ 23 pages of specification, claims, abstract.
- ☒ Declaration and Power of Attorney.
- ☒ Priority Claimed.
- ☒ Certified copy of Japanese Patent Application No. 11-168690
- ☒ 11 sheets of formal drawing.
- ☒ An assignment of the invention to Minolta Co., Ltd.
and the assignment recordation fee.
- ☐ An associate power of attorney.
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☐ Information Disclosure Statement, Form PTO-1449 and reference.
- ☒ Return Receipt Postcard
- ☐


The filing fee has been calculated as shown below:

	NO. OF CLAIMS		EXTRA CLAIMS	RATE	AMOUNT
Total Claims	11	-20	0	\$18.00	\$0.00
Independent Claims	5	-3	2	\$78.00	\$156.00
Multiple Dependent Claim(s)					\$0.00
Basic Fee					\$690.00
Total of Above Calculations					\$846.00
Less ½ for Small Entity					\$0.00
Assignment & Recording Fee					\$40.00
Total Fee					\$886.00

- ☒ Please charge my Deposit Account No. 500417 in the amount of \$886.00. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 500417. A duplicate copy is enclosed.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 500417. A duplicate copy of this sheet is enclosed.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

MCDERMOTT, WILL & EMERY


Edward J. Wise
Registration No. 34,523

600 13th Street, N.W.
Washington, DC 20005-3096
(202) 756-8000 EJW:dtb
Date: June 8, 2000
Facsimile: (202) 756-8087

003090" 60768560

Image Processing Apparatus, Image Processing Method,
and Recording Medium Recorded with Image Processing
Program to Process Image Taking into Consideration
Difference in Image Pickup Condition Using AAM

5

This application is based on Japanese Patent Application No. 11-168690 filed in Japan, the contents of which are hereby incorporated by reference.

BACKGROUND OF THE INVENTION

10

Field of the Invention

The present invention relates to an image processing apparatus, an image processing method, and a recording medium recorded with an image processing program. More particularly, the present invention relates to an image processing apparatus, an image processing method, and a recording medium recorded with an image processing program to process an image taking into consideration difference in the pickup condition of a face image using an AAM (Active Appearance Model).

15

Description of the Related Art

20

As a method of synthesizing a natural face image by analyzing statistically many face images without using a three-dimensional shape, Cootes et al. of University of Manchester have proposed a method using an AAM. The method using an AAM includes the steps of extracting shape information and texture information from the position, grey-level value and the like of landmark points defined for each feature of the face from a large number of two-dimensional face images, applying principal component analysis on each of the plurality of extracted shape information and texture information, and obtaining an orthonormal coordinate system (image space) corresponding to change in the shape and face expression, and altering the parameters along respective coordinate axes of the obtained image space to synthesize a face image. When an AAM is employed in an image recognition method, the parameters are altered within an obtained image space to synthesize an image. The parameters of the synthesized image that has the smallest difference from the face image that is the subject of

25

30

recognition are obtained. By measuring the distance from the landmark vector of a face image that is already registered with the obtained parameters, recognition is made whether the image matches or not.

Japanese Patent Laying-Open No. 6-168317 discloses an individual identification apparatus taking into account inclination of the face. According to this individual identification apparatus, the position information of the landmark point of a face image is obtained to calculate the leftwards and rightwards rotation angle on the basis of the obtained position information and depth information of a reference face model. The position information of the landmark point is corrected so that the rotation angle becomes zero according to the obtained rotation angle and depth information. The individual identification process is carried out using the corrected landmark points. This individual identification apparatus can prevent reduction in the recognition rate of an input face image even if there is rotational difference leftwards or rightwards (the direction of turning the neck horizontally) between the face image that is registered in advance and the input face image.

The foregoing AAM employs a two-dimensional image. It is to be noted that shape information corresponds to the two-dimensional coordinates of a landmark point defined for each feature of a face. There was a problem that, from the extracted shape information, difference in the inclination of the face image in the depth direction could not be made such as whether the two-dimensional face image corresponds to a face oriented frontwards, upwards, or downwards. For example, the two-dimensional face image of a person with a wide forehead will be represented with a small forehead when the face is inclined upwards. If distinction of the face image in the depth direction cannot be made, the shape information extracted from the two-dimensional face image will erroneously represent the shape of a person with a small forehead.

The art disclosed in the foregoing Japanese Patent Laying-Open No. 6-168317 can accommodate difference in the rotation angle of the face in the horizontal direction in image recognition. However, there was a problem that upward or downward rotation, i.e. inclination in the depth direction,

could not be accommodated.

As to an image obtained by shooting in a dark place and an image obtained by shooting in a light place, the object, even though identical, will be represented in different colors in the image. To remove this difference in the illumination condition, normalization of the light intensity was effected conventionally. In that case, there was a problem that difference in the color of the skin could not be identified. In other words, there was a problem that the tendency of the characteristic feature of a face arising from difference in nationality could not be extracted.

SUMMARY OF THE INVENTION

In view of the foregoing, an object of the present invention is to provide an image processing apparatus, an image process method, and a recording medium recorded with an image processing program that can eliminate influence of difference in the image pickup condition from the input image.

Another object of the present invention is to provide an image processing apparatus, an image processing method, and a recording medium recorded with an image processing program that can synthesize an image of an object, eliminated with influence of difference in the image pickup condition from the input image.

A further object of the present invention is to provide an image processing apparatus, an image processing method, and a recording medium recorded with an image processing program that allows recognition of an object differing by different image pickup conditions as the same object.

According to an aspect of the present invention, an image processing apparatus includes a landmark amount input unit to input a landmark amount of an object included in the input image, an image pickup condition input unit to input the image pickup condition of shooting the input image, and an image space formation unit to form an image space by applying a statistical method on the plurality of landmark amounts input through the landmark amount input unit and a plurality of image pickup conditions input through the image pickup condition input unit with respect to a plurality of object images.

According to the present invention, an image processing apparatus that can eliminate influence of difference in the image pickup condition from the input image can be provided.

5 According to another aspect of the present invention, an image processing apparatus includes a storage unit to store an image space generated according to the landmark amount of an object included in the image and the image pickup condition of shooting the image, a parameter input unit to input a parameter of the image space, and an image synthesis unit synthesizing an image according to the parameter input through the parameter input unit.

10 According to the present invention, an image processing apparatus that can synthesize an image of an object eliminated with influence of difference in the image pickup condition from the input image can be provided.

15 According to a further aspect of the present invention, an image processing apparatus includes a first storage unit to store an image space generated according to a landmark amount of an object included in an image and an image pickup condition of shooting the image, a parameter optimization unit automatically extracting a first parameter whose difference between a first object included in the input image and an image synthesized by moving the parameter in the image space is smallest, a second storage unit storing a plurality of second objects respectively in correspondence with a second parameter in an image space, and a selection unit comparing the first parameter with the second parameter to select a
20 desired object from the plurality of second objects.

25 According to the present invention, an image processing apparatus can be provided that allows recognition of an object differing due to different image pickup conditions as the same object.

30 According to still another aspect of the present invention, an image processing method includes the steps of entering a landmark amount of an object image included in an input image, entering an image pickup condition of shooting the input image, and forming an image space by applying a statistical method on a plurality of landmark amounts input at the step of

entering a landmark amount and a plurality of image pickup conditions input at the step of entering an image pickup condition with respect to a plurality of object images.

According to the present invention, an image processing method can be provided that allows influence of difference in the image pickup condition removed from the input image.

According to a still further aspect of the present invention, a recording medium is recorded with an image processing program for a computer to execute the steps of entering a landmark amount of an object included in an input image, entering an image pickup condition of shooting the input image, and forming an image space by applying a statistical method on a plurality of landmark amounts input at the step of entering a landmark amount and a plurality of image pickup conditions input at the step of entering an image pickup condition with respect to a plurality of object images.

According to the present invention, a recording medium can be provided recorded with a image processing program for a computer to execute an image process that can eliminate influence of difference in the image pickup condition from an input image.

The foregoing and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the hardware structure of an image processing apparatus according to a first embodiment of the present invention.

Fig. 2 is a block diagram schematically representing the image space formation function of an image processing apparatus according to the first embodiment.

Fig. 3 is a schematic diagram showing a face image and landmark points.

Fig. 4 represents distribution of a face image oriented frontwards,

upwards and downwards in the X_1 - X_2 coordinates of respective landmark points.

Fig. 5 represents distribution of respective landmark points with an Z axis provided perpendicular to the X_1 - X_2 coordinates.

Fig. 6 shows a main axis A derived by the principal component analysis.

Fig. 7 is a block diagram schematically showing the image synthesis function and image recognition function of the image processing apparatus of the first embodiment.

Fig. 8 is a flow chart of the image space formation process carried out by the image processing apparatus of the first embodiment.

Fig. 9 is a flow chart of the image synthesis process carried out by the image processing apparatus of the first embodiment.

Fig. 10 is a flow chart of the image recognition process carried out by the image processing apparatus of the first embodiment.

Fig. 11 is a block diagram schematically showing the image synthesis function and image recognition function of an image processing apparatus according to a second embodiment of the present invention.

Fig. 12 is a flow chart of the image synthesis process carried out by the image processing apparatus of the second embodiment.

Fig. 13 is a flow chart of the image recognition process carried out by the image processing apparatus of the second embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will be described hereinafter with reference to the drawings. In the drawings, likewise or corresponding components have the same reference characters allotted.

First Embodiment

Referring to Fig. 1, an image processing apparatus according to a first embodiment of the present invention includes a control unit 100, an image input unit 101 to input an image of a person's face, an operation unit 102 for the user of the apparatus to enter data and various instructions, a storage unit 103 recorded with a program to be executed by control unit 100, and to store information required for control unit 100 to execute a program,

an output unit 104 to output an image, and an external storage device 105.

Control unit 100 is a central processing unit (CPU) to provide overall control of the image processing apparatus. Image input unit 101 is an image scanner including a linear CCD sensor to read in a photographic picture or the like with a face to provide two-dimensional face image data. It is to be noted that a digital camera or the like can be used to actually shoot an individual to provide a two-dimensional face image. Also, image input unit 101 may be an input terminal for connection with an external image scanner or digital camera.

Storage unit 103 includes a ROM to store a program to be executed by control unit 100, a RAM to temporarily store variables or the like required to execute a program with control unit 100, a hard disk to store various data, and the like.

Output unit 104 is a display to display the image input through image input unit 101 or an image subjected to image processing. A printer can be used together with the display.

External storage device 105 is a magneto-optical disk drive or a digital video disk drive to read in a program recorded in a recording medium 106 to be executed with control unit 100 or two-dimensional face image data. A synthesized face image subjected to the image synthesis process with control unit 100 and the image recognition result can be written into recording medium 106.

Fig. 2 is a function block diagram schematically showing the image space formation function of the image processing apparatus of the first embodiment. The image processing apparatus includes a landmark data input unit 111 to input data of a landmark point of a two-dimensional face image input through image input unit 101, an inclination amount input unit 113 to input the amount of inclination of the two-dimensional face image in the depth direction, and an image space formation unit 115 applying principal component analysis according to the landmark data and inclination amount input through landmark data input unit 111 and inclination amount input unit 113 to generate an image space represented by a basic vector. The basic vector of the image space generated by image

space formation unit 115 is stored in storage unit 103. The face image input through image input unit 101 and used in generation of the image space is stored in storage unit 103 together with the parameter in the image space.

5 Landmark data input unit 111 receives as landmark data the coordinates of a landmark point to identify the contour of the face, the eye, nose or mouth of the face image input through image input unit 101 and the grey-level value of the texture of the face image. The two-dimensional face image input through image input unit 101 is shown on the display of output unit 104. The operator views the face image provided on the display of output unit 104 and clicks a predetermined position using the mouse of operation unit 102. The position clicked with the mouse becomes a landmark point. The coordinates and the grey-level value of the texture of the face image corresponding to that landmark point are input as landmark data.

The landmark point will be described in further detail hereinafter. Fig. 3 schematically shows a face image and the landmark points. Referring to Fig. 3, a face contour 10, eye contours 30 and 40, a nose contour 50 and a mouth contour 60 are indicated. A landmark point is defined with respective contours 10, 30, 40, 50 and 60 as a reference. Eleven landmark points 11-21 are identified on the basis of face contour 10. Four landmark points 31-34 are identified on the basis of right eye contour 30. Four landmark points 41-44 are identified on the basis of left eye contour 40. Five landmark points 51-55 are identified on the basis of nose contour 50. Five landmark points 61-65 are identified on the basis of mouth contour 60.

Only twenty nine landmark points are shown in Fig. 3 for the sake of simplification. It is desirable that landmark points sufficient to give the feature of a shape are provided. Preferably, approximately 122 landmark points should be provided.

30 As to the inclination amount input unit of Fig. 2, the amount of inclination of the face image in the depth information input through image input unit 101 is entered. The operator views the face image on the display of output unit 104 to determine whether the face is oriented frontwards,

upwards or downwards to enter the inclination amount in the depth direction through the keyboard of operation unit 102. For example, the inclination amount is set to α when facing upwards, to 0 when facing frontwards, and to $-\alpha$ when facing downwards (α is positive number).

5 Image space formation unit 115 carries out principal component analysis using a plurality of landmark data input through landmark data input unit 111 and a plurality of inclination amounts input through inclination amount input unit 113 with respect to face images input through image input unit 101. As a result of the principal component analysis, the
10 obtained orthonormal coordinates are stored in storage unit 103 as the image space. Also, the image data input through image input unit 101, the landmark data and inclination amount corresponding to respective image data, and the parameter in the image space are stored in correspondence in storage unit 103.

15 The image processing apparatus of the present embodiment carries out the principal component analysis taking into consideration the inclination amount, differing from the principal component analysis carried out in an AAM. For the sake of simplifying the description, X_1 and X_2 are respective components of the vectors of the landmark point data aligned in the X and Y coordinates, S_1 is a landmark point of a face image oriented
20 frontwards, S_2 is a landmark point of a face image oriented upwards, and S_3 is a landmark point of a face image oriented downwards.

Fig. 4 shows a distribution of respective landmark points of face images oriented frontward, upward, and downward along the X_1 - X_2
25 coordinates. The circle located at the center represents the distribution of landmark points S_1 of a face image oriented frontwards. The overlapping circles at respective sides represent the distribution of landmark points S_2 of a face image oriented upwards and the distribution of landmark points S_3 of a face image oriented downwards. Here, the presence of correlation
30 between components X_1 and X_2 is observed. However, it is not definite whether that correlation arises from inclination of the face or from difference in the shape. In other words, determination cannot be made whether this difference in distribution is caused by difference in a face

image oriented frontwards, upwards or downwards, or difference in the face image itself oriented frontwards. By providing another Z axis, determination can be made between distribution of landmark points of a face image oriented frontwards and distribution of landmark points of a face image oriented upwards or downwards.

Fig. 5 represents distribution of landmark points with an Z axis newly provided perpendicular to the X_1 - X_2 coordinates. Referring to Fig. 5, distinction is made among the distribution of landmark points S_1 of a face image oriented frontwards, distribution of landmark points S_2 of a face image oriented upwards, and distribution of landmark points S_3 of a face image oriented downwards. This indicates that the correlation between X_1 and X_2 is caused by difference in the orientation of frontwards, upwards or downwards. It is appreciated that respective distributions of landmark point S_1 of a face image oriented frontwards, landmark point S_2 of a face image oriented upwards and landmark point S_3 of a face image oriented downwards at respective X_1 - X_2 coordinate planes are absent of correlation between X_1 and X_2 .

The result of applying principal component analysis on the landmark points of this three-dimensional space (X_1 , X_2 , Z) is shown in Fig. 6. Referring to Fig. 6, a main axis A indicating the inclination of the face image in the depth direction can be derived from the principal component analysis. Therefore, determination can be made that the correlation of the distribution of X_1 and X_2 has originated from face inclination. Thus, an axis (H) corresponding to change in a face oriented frontwards can be derived independent of the axis (A) corresponding to change in the face inclination. In Fig. 6, the H axis represents the plane of X_1 - X_2 .

By altering the component along the obtained main axis A, the face image can be altered corresponding to the inclination of the face in the depth direction. Also, by adjusting the component along the axis within the orthogonal complement with respect to partial space represented by main axis A, the face image can be deformed independent of the change by inclination in the depth direction. Therefore, an image can be synthesized effectively.

or oriented upwards/downwards can be synthesized and output even in the case where the face image input through image input unit 101 is inclined in the depth direction.

5 Image recognition unit 119 selects a face image whose distance between the vector with the landmark parameter obtained at parameter optimization unit 121 as the component and the vector with the landmark parameter of the face image stored in storage unit 103 as the component becomes smaller than a predetermined value out of the face images stored in storage unit 103. As this vector distance, the Mahalanobis distance taking
10 into consideration data variance can be employed as well as the Euclidean distance.

The face image stored in storage unit 103 is the face image used in forming the image space at image space formation unit 119. The face image may also be a face image input after configuring the image space at
15 image space formation unit 119.

The image space formation process carried out by the image processing apparatus of the present embodiment will be described with reference to the flow chart of Fig. 8. A face image of reference is input through image input unit 101 (S01). Here, a reference face image refers to
20 the face image used in forming an image space at image space formation unit 115.

The reference face image input through image input unit 101 is normalized (S02). Normalization means that the size of the input reference face image is set to fit a predetermined reference. More specifically, the
25 distance between the two eyes of a face image is set to conform to a predetermined value.

The coordinates of the landmark point and the grey-level value of the texture for the reference face image input through image input unit 101 are input by landmark data input unit 111 (S03). Then, the inclination
30 amount of the input reference face image in the depth direction is input by input unit 113 (S04).

At step S05, determination is made whether there is another reference face image to be input. This determination is made by the signal

input by the user through operation unit 102. In the case where there is another reference face image, the foregoing process of steps S01-S04 is carried out for the newly input reference face image. When there is no other reference face image to be input, control proceeds to step S06. By
5 carrying out the process of steps S01-S04 on a plurality of reference face images, the landmark data and inclination amount are input for each of the plurality of reference face images.

At step S06, principal component analysis is carried out for all the landmark data and inclination amount of the reference face image input
10 through image input unit 101. The principal component analysis is a well known statistical method, so that description thereof will not be provided here. Upon extracting the main component at step S06, control proceeds to step S07 to determine whether the total of the contribution rate is greater than threshold value T or not. The principal component analysis of step
15 S06 is repeatedly carried out until the total of the contribution becomes larger than threshold value T.

When the contribution becomes larger than threshold value T, control proceeds to step S08 to store the basic vector representing the main component in storage unit 103. An image space is formed by the basic
20 vector stored in storage unit 103.

At step S09, the landmark parameter in the image space obtained at step S08 is derived for the reference face image input through step S01. The obtained landmark parameter is stored in storage unit 103 in
correspondence with the reference face image.

Thus, following formation of an image space, a database of a face image is generated including the reference face image used in producing the image space and the landmark parameters. The reference face image may be face images of completely different individuals, or face images of the same individual. In the case where the face images correspond to those of the
25 same individual, the distribution of the landmark parameters representing the face image of the same individual in the image space is provided in a
30 clustering range due to difference in the expression.

The image synthesis process carried out by the image processing

apparatus of the present invention will be described with reference to the flow chart of Fig. 9. A processing face image is input through image input unit 101 (S11). Here, a processing face image refers to a face image that is to be subjected to image synthesis. Here, image synthesis is carried out by altering the face image of the individual represented in the processing face image to synthesize a face image of various expressions.

At step S12, the input processing face image is normalized. The foregoing description applies to normalization.

At step S13, the landmark parameter of the processing face image is optimized. Optimization of the landmark parameter is carried out by comparing the image synthesized at the image space using provisionally set landmark parameter with the processing face image and altering the landmark parameter in a direction where the difference between the images becomes the smaller. The optimized landmark parameter is the landmark parameter of the synthesized image corresponding to the smallest difference between the reference face image and the image synthesized at the image space. Accordingly, the landmark parameter of the processing face image input through step S11 in the image space is obtained. By altering the landmark parameter obtained at step S13, a face image of a different expression is synthesized in the image space (S14).

The image synthesis process carried out by the image processing apparatus of present embodiment is performed on the basis of the input processing face image. Alternatively, the landmark parameter can be directly input through manipulation unit 102 for each coordinate axis of the image space formed by the image space formation unit. In this case, the process of steps S11-S13 is dispensable.

The image recognition process carried out by the image processing apparatus of the present embodiment will be described with reference to the flow chart of Fig. 10. The process from steps S21-S23 is identical to the process from steps S11-S13 in the image synthesis process of Fig. 9. Therefore, description thereof will not be repeated. At step S23, upon obtaining the landmark parameter of the processing face image input through image input unit 101 in the image space at step S23, the vector with

the landmark parameter of the processing face image as the component is compared with the vector with the landmark parameter of the reference face image stored in storage unit 103 as the component (S24). At step S25, determination is made whether the distance from respective vectors is smaller than a predetermined value L. When smaller than predetermined value L, control proceeds to step S26, otherwise to step S27.

It can be said that the processing face image resembles the reference face image more as the distance between the vectors becomes smaller. Therefore, determination can be made that the processing face image and the reference face image correspond to the same individual when the distance between the vector of the processing face image and the vector of the reference face image is smaller than threshold value L.

At step S26, the reference face image compared in step S25 is selected and provided to output unit 104. Then, the image recognition process ends.

At step S27, determination is made whether there is another reference face image to be subjected to comparison in storage unit 103. When there is a reference face image in storage unit 103, control proceeds to step S24. When there is no more reference face image, the image recognition process ends.

Here, the reference face image is the face image used in forming the image space of image space formation unit 115. The reference face image may be a face image input after the image space has been produced at image space formation unit 115.

According to the image processing apparatus of the present embodiment, principal component analysis is carried out with the inclination amount indicating inclination of the face image in the depth direction added to the landmark point data of the input face image to form an image space. Therefore, a face image can be synthesized corresponding to the inclination in the depth direction at the image space. Also, by adjusting the component along an axis in an orthogonal complement corresponding to the partial space represented by the main axis indicating inclination of the face image in the depth direction, the face can be deformed

independent of the change due to inclination in the depth direction to synthesize an image. As a result, an image can be synthesized effectively.

Since the similarity with the face image stored in the storage unit is determined taking into account inclination of the input face image in the depth direction, distinction can be made between a variation mode of the same individual caused by difference in inclination of the depth direction and the variation mode due to difference in the shape of a different individual facing frontwards. The possibility of erroneous recognition due to difference in the inclination of the face in the depth direction can be reduced. As a result, the accuracy in recognition can be improved.

In the present embodiment, grey-level value is used as texture information. Color data can be also used.

In the present embodiment, landmark data corresponds to the coordinates of a landmark point and the grey-level value of the texture of the face image. However, image space formation, image synthesis and image recognition can be carried out using only the coordinates of the landmark point, or only the texture of a face image.

In the present embodiment, an image space is produced by carrying out principal component analysis with the inclination amount of an object in the depth direction as the image pickup condition in the present embodiment. The orientation of an object in the left or right direction (the direction of the face turning horizontally), or the occupying ratio of the object in the input image can be taken as the image pickup condition. In the case where the horizontal orientation of the object is taken as the image pickup condition, an image of an object oriented frontwards can be synthesized based on an image obtained by shooting an object from the side or obliquely from the side, not from the front. When the occupying ratio of the object in the image is to be taken as the image pickup condition, an image can be synthesized or recognized taking into consideration whether the actual face of the object is large or not. The image pickup condition can be used singularly or in combination.

Furthermore, the lighting condition or color temperature can be added as the image pickup condition. For example, in the case where an

image space is formed with the brightness of the illumination taken as the image pickup condition, the image space can be formed taking into account the skin color of the object. More specifically, principal component analysis is carried out with the illumination of a bright or dark level as the image pickup condition to produce an image space. Accordingly, the object in the image obtained by shooting under the condition where illumination is not sufficient will be reduced in density. However, an image of an object with light skin color can be synthesized. Also, an image can be synthesized using an axis that has correlation with the skin color.

Furthermore, the input image can be subjected to Fourier transform or subjected to wavelet transform to become a wavelet factor so as to be employed as the image pickup condition.

Second Embodiment

An image processing apparatus according to a second embodiment of the present invention is directed to improvement of the parameter optimization unit of the image processing apparatus of the first embodiment. Components corresponding to those of the image processing apparatus of the first embodiment will not be repeatedly described.

Fig. 11 is a block diagram schematically showing the function of image synthesis and image recognition of the image processing apparatus of the second embodiment. Referring to Fig. 11, an image processing apparatus of the second embodiment includes a parameter optimization unit 121A obtaining a landmark parameter of the input face image at an image space, an image synthesis unit 117 to synthesize an image at the image space based on the obtained landmark parameter, and an image recognition unit 119 to select a face image identical to the input face image out of a plurality of face images prestored in storage unit 103.

Landmark data input unit 122 enters the coordinates of the landmark point of the face image input through image input unit 101 and the grey-level value of the texture of the face image as landmark data. Inclination amount input unit 123 enters an inclination amount of the face image input through image input unit 101 in the depth direction.

A projection unit 124 projects the landmark vector represented by

the landmark data input through landmark data input unit 122 and the inclination amount input through inclination amount input unit 123 onto the coordinate axes of the image space stored in storage unit 103. A landmark parameter is obtained for each coordinate axis by the projection
5 onto the coordinate axis of the image space. The obtained landmark parameter is provided to image synthesis unit 117 or image recognition unit 119.

Fig. 12 is a flow chart of the image synthesis process carried out by the image processing apparatus of the second embodiment. A reference
10 face image is input through image input unit 101 (S31). The input reference face image is normalized (S32).

Then, the coordinates and the grey-level value of the texture of the landmark point of the input reference face image are input (S33). The inclination amount of the reference face image in the depth direction is
15 input (S34).

At step S35, the landmark vector represented by the input landmark data and inclination amount is projected at the image space stored in storage unit 103. As a result, the landmark parameter of the processing
20 face image input at step S31 in the image space is obtained. By altering the obtained landmark parameter, a face image of a different expression in the image space is synthesized (S36).

Fig. 13 is a flow chart of the image recognition process carried out by the image processing apparatus of the second embodiment. The process of steps S41-S45 is identical to the process of steps S31-S35 of the image
25 synthesis process of Fig. 12. Therefore, description thereof will not be repeated. At step S45, a landmark parameter of the processing image input through image input unit 101 in the image space is obtained. The vector with the landmark parameter of the processing face image as the component is compared with the vector with the landmark parameter of the
30 reference face image stored in storage unit 103 as the component (S46). At step S47, determination is made whether the distance from respective vectors is smaller than a predetermined value L. When smaller than predetermined value L, control proceeds to step S48, otherwise to step S49.

Determination is made that the processing face image and the reference face image correspond to the same individual when the distance between the vector of the processing face image and the vector of the reference face image is smaller than threshold value L.

5 At step S48, the reference face image compared at step S46 is selected and provided to output unit 104. Then, the image recognition process ends.

10 At step S49, determination is made whether another reference face image to be subjected to comparison is stored in storage unit 103 or not. When there is another reference face image stored in storage unit 103, control proceeds to step S46. In the case where there is no other reference face image, the image recognition process ends.

15 In the first and second embodiments, input of the inclination amount is carried out manually. Measurement means such as a laser sensor or ultrasonic sensor can be provided to enter the landmark point as three-dimensional data. In this case, it is not necessary to input the inclination amount since the landmark data corresponds to three-dimensional data. An advantage similar to that described in the foregoing can be obtained.

20 The process described of the image processing apparatus with reference to the flow charts of Figs. 7, 8, 9, 11 and 12 is applicable to an image processing method or a recording medium recorded with an image processing program executing the same process.

25 Although the present invention has been described and illustrated in detail, it is clearly understood that the same is by way of illustration and example only and is not to be taken by way of limitation, the spirit and scope of the present invention being limited only by the terms of the appended claims.

WHAT IS CLAIMED IS:

1. An image processing apparatus comprising:
a landmark amount input unit to input a landmark amount of an
object image included in an input image,
an image pickup condition input unit to input an image pickup
condition of shooting said input image, and
an image space formation unit to form an image space by applying a
statistical method on a plurality of said landmark amounts input through
said landmark amount input unit and a plurality of image pickup conditions
input through said image pickup condition input unit with respect to a
plurality of object images.

2. The image processing apparatus according to claim 1, wherein
said plurality of landmark amounts input through said landmark amount
input unit include a plurality of coordinate values to identify a shape of said
object image.

3. The image processing apparatus according to claim 1, wherein
said plurality of landmark amounts input through said landmark amount
input unit include a plurality of grey-level values of texture of said object
image.

4. The image processing apparatus according to claim 1, wherein
said image pickup condition input through said image pickup condition
input unit includes brightness of illumination during shooting.

5. The image processing apparatus according to claim 1, wherein
said image pickup condition input through said image pickup condition
input unit includes inclination of said object image included in said input
image in a depth direction.

6. An image processing apparatus comprising:

a storage unit to store an image space generated according to a landmark amount of an object image included in an image and an image pickup condition of shooting said image,

5 a parameter input unit to input a parameter at said image space, and

an image synthesis unit to synthesize an image according to the parameter input through said parameter input unit.

7. The image processing apparatus according to claim 6, wherein said parameter input unit includes a parameter optimization unit to automatically extract a parameter whose difference between an input image and a synthesized image obtained by moving the parameter in said image space becomes smallest.

5

8. The image processing apparatus according to claim 6, wherein said parameter input unit includes a projection unit to project said landmark amount input through said landmark amount input unit and said image pickup condition input through said image pickup condition input unit onto said image space to obtain a parameter.

5

9. An image processing apparatus comprising:

a first storage unit to store an image space generated according to a landmark amount of an object image included in an image and an image pickup condition of shooting said image,

5

a parameter optimization unit to automatically extract a first parameter whose difference between a first object image included in said input image and a synthesized image obtained by moving a parameter in said image space becomes smallest,

10 a second storage unit to store a plurality of second object images respectively in correspondence with a second parameter in said image space, and

a select unit to compare said first parameter with said second parameter to select a desired object image out of said plurality of second

ABSTRACT OF THE DISCLOSURE

In order to eliminate influence due to difference in the image pickup condition from an input image, an image processing apparatus includes a landmark point data input unit to input coordinates of a landmark point of a face image input through an image input unit and the grey-level value of texture of a face image, an inclination amount input unit to input an inclination amount of a face image in the depth direction, and an image space formation unit forming an image space by carrying out principal component analysis on a plurality of landmark point data and a plurality of inclination amounts with respect to a plurality of the input face images.

FIG. 1



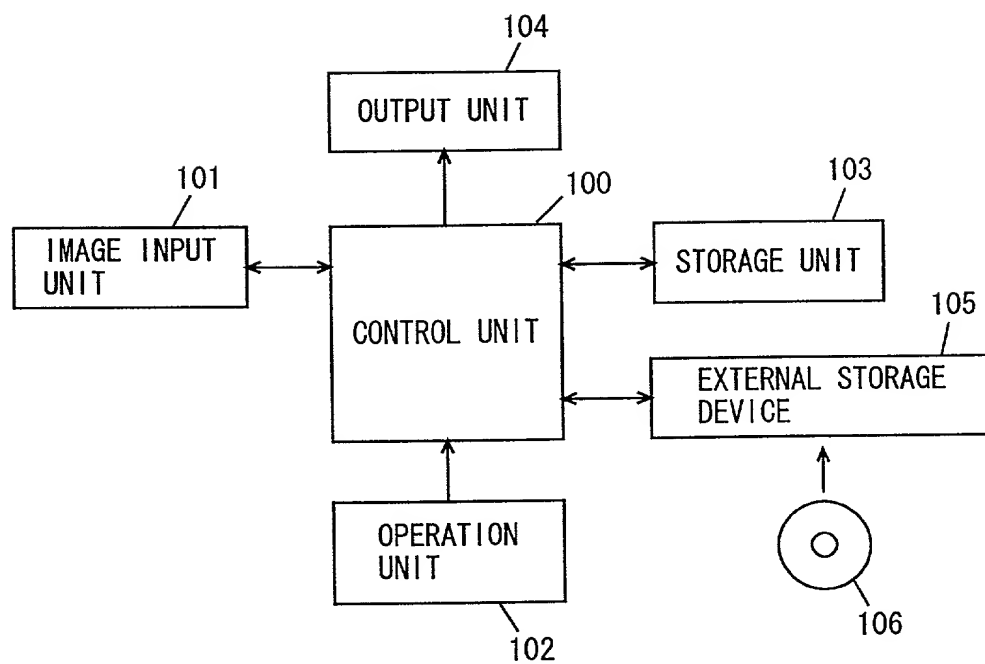


FIG. 2

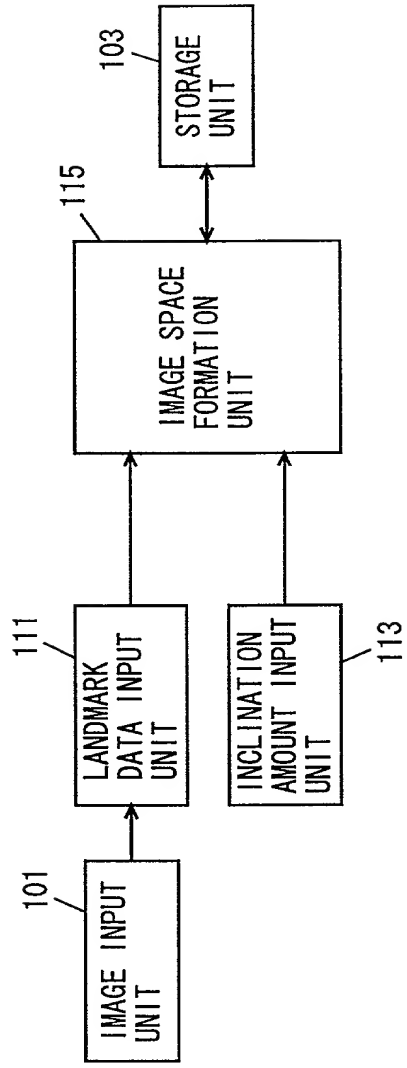

008090" 60768560

F I G. 3

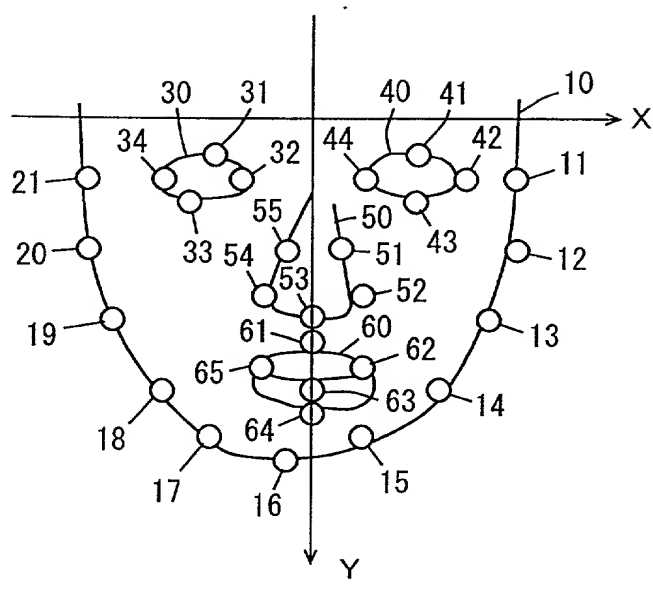

F I G. 4

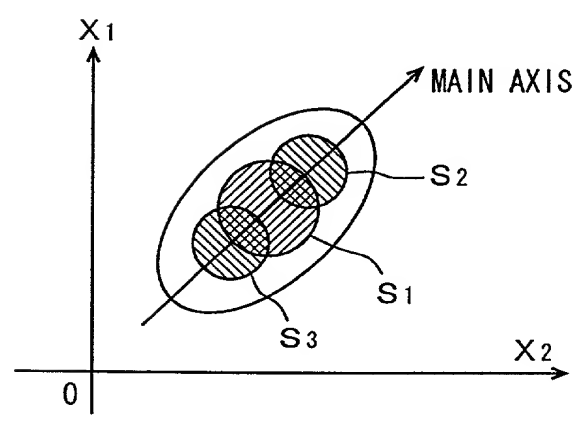


FIG. 5

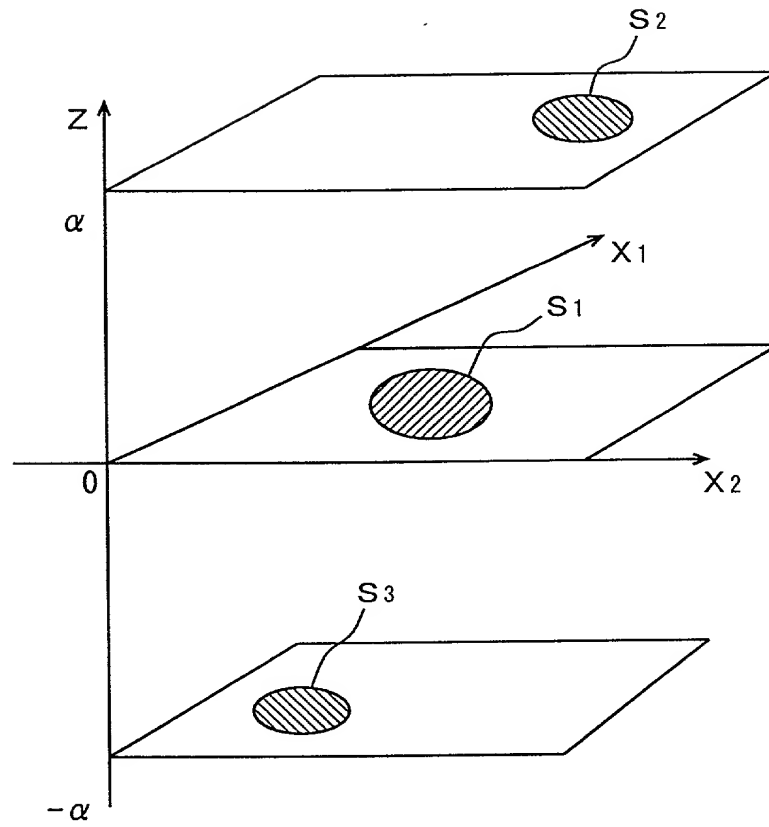


FIG. 6

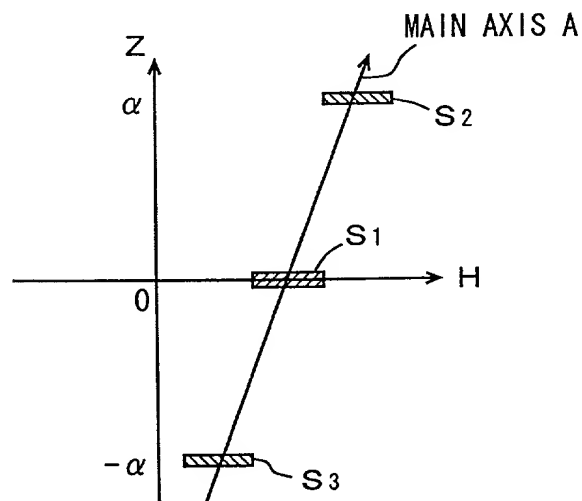


FIG. 7

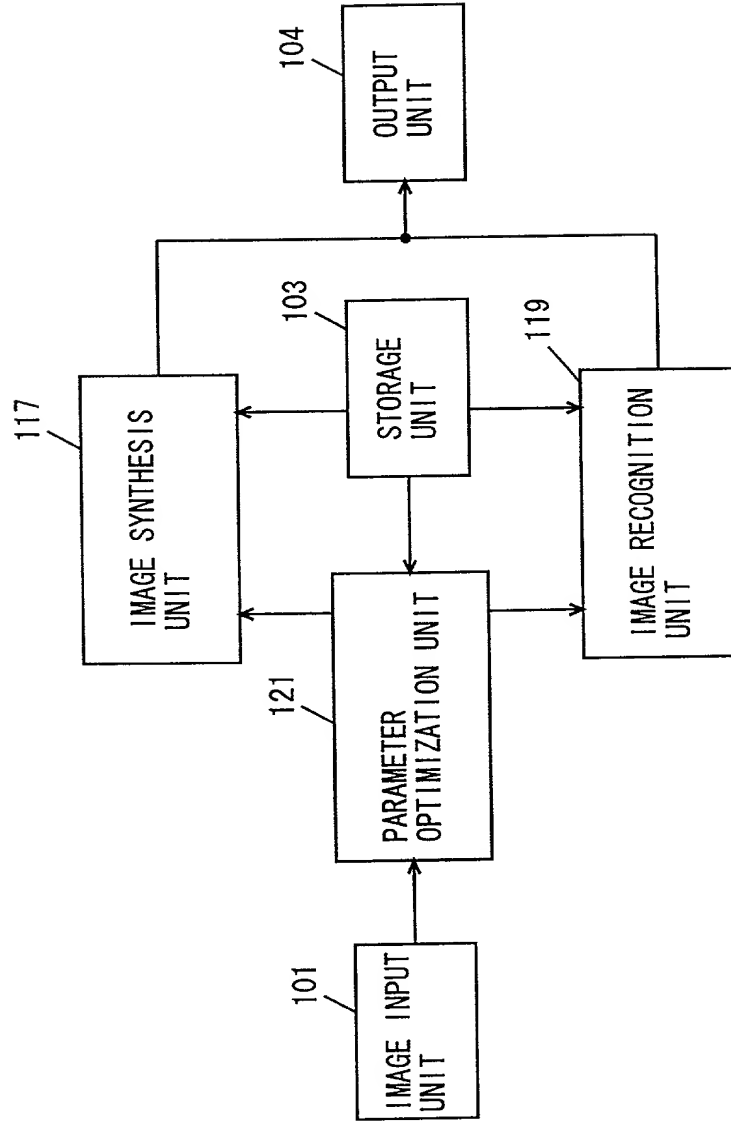


FIG. 8

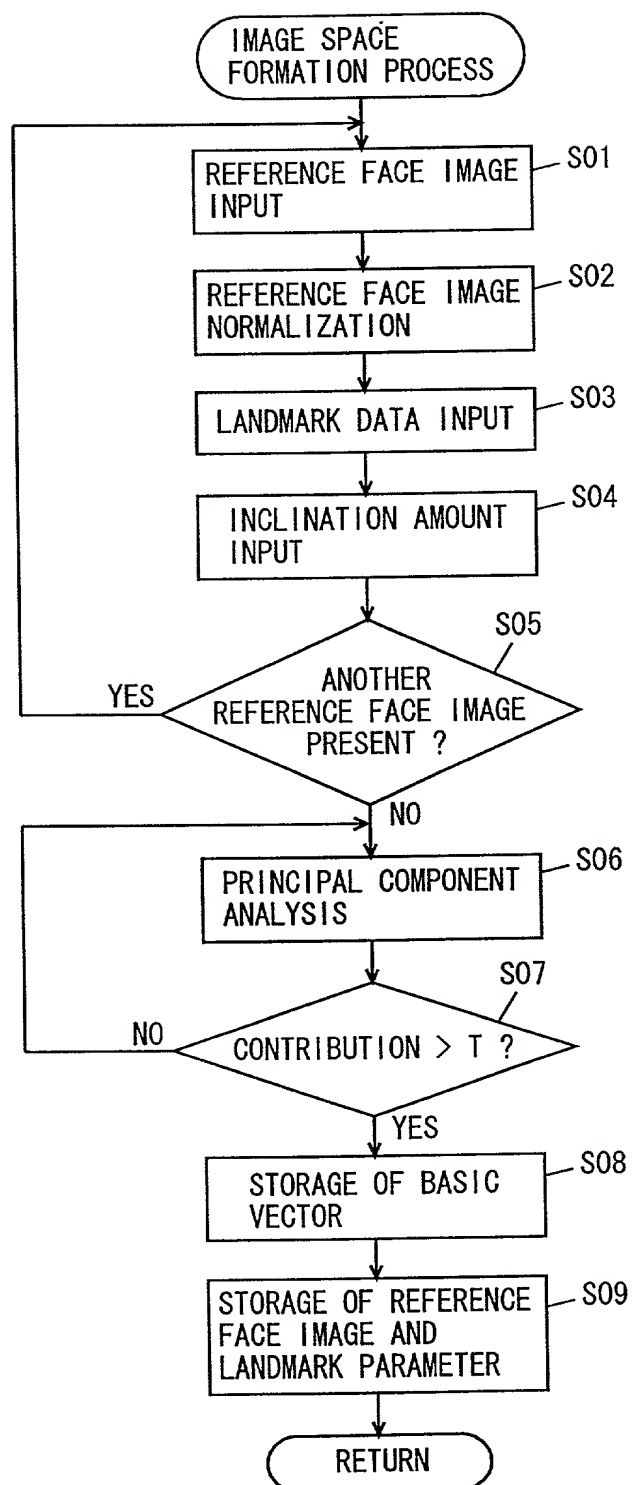


FIG. 9


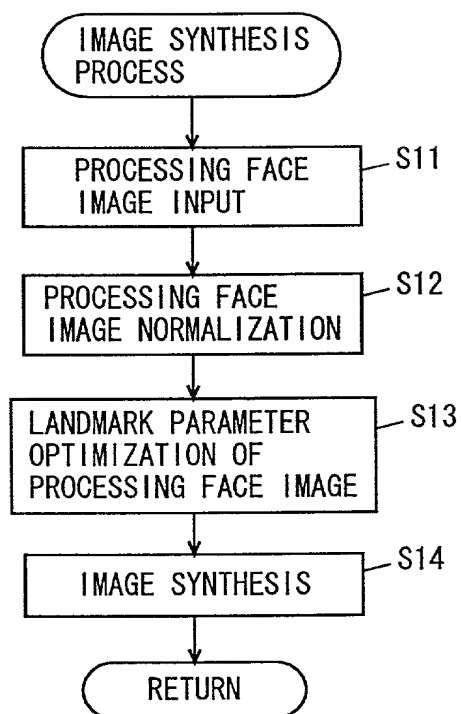


FIG. 10

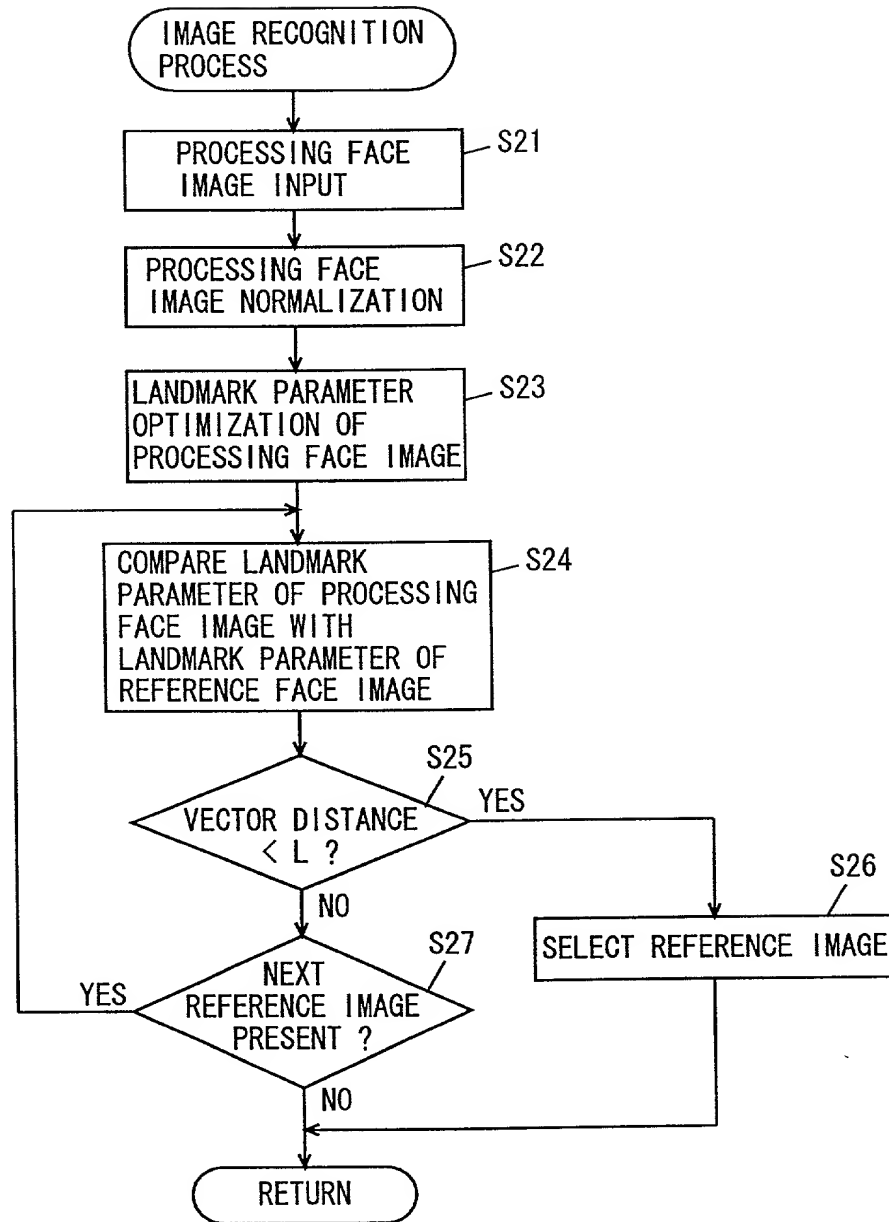

008090" 60168560

FIG. 11



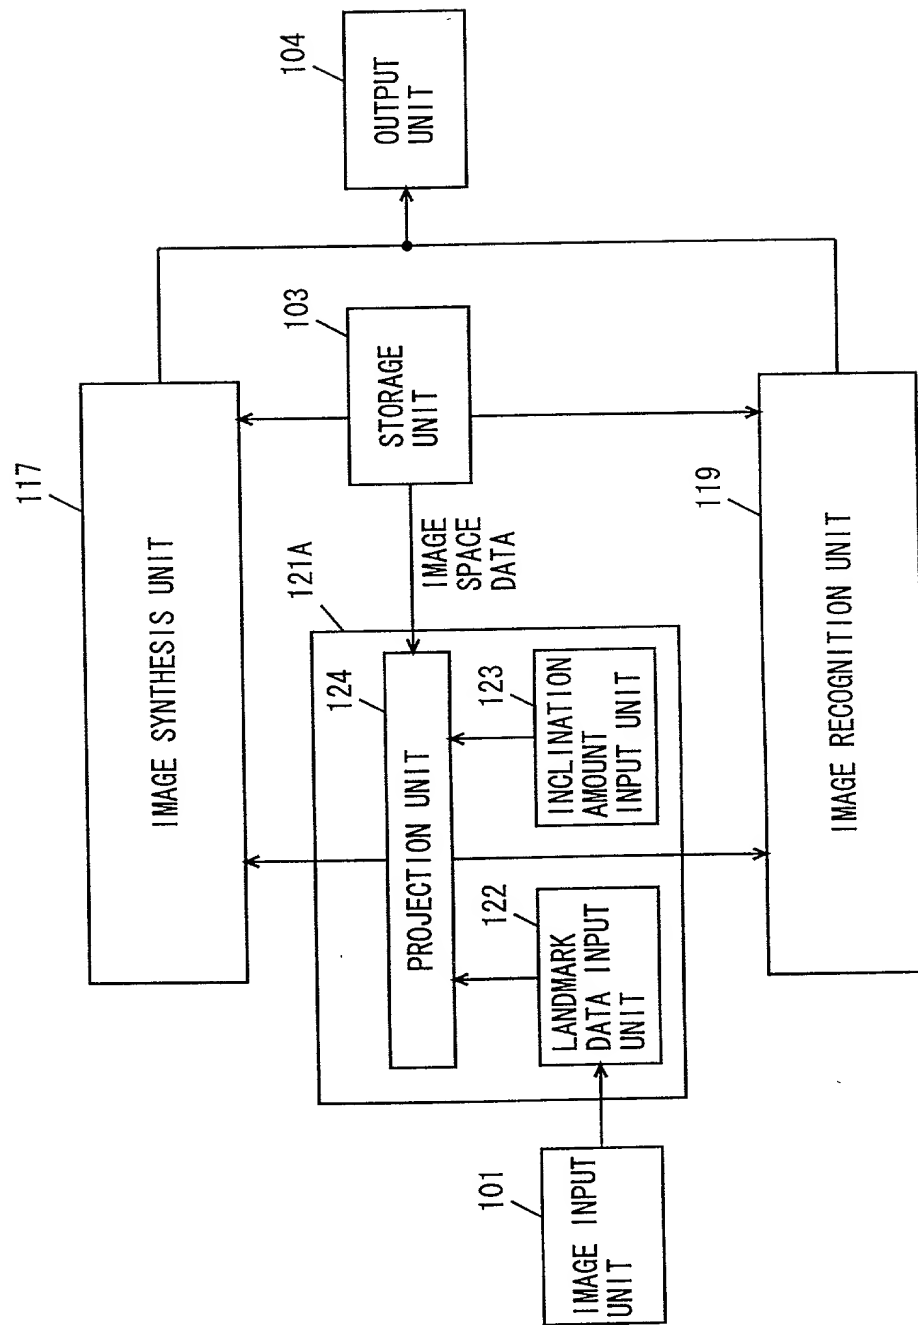


FIG. 12

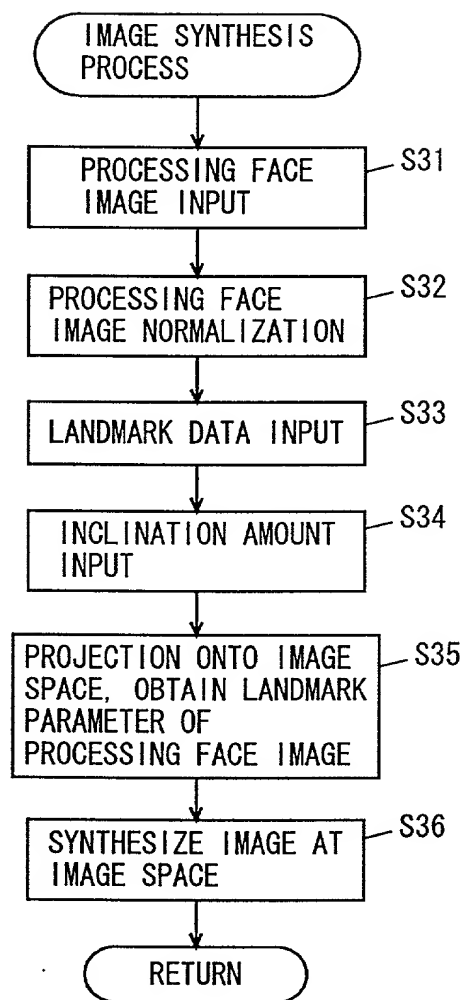

008090" 60F68560

FIG. 13

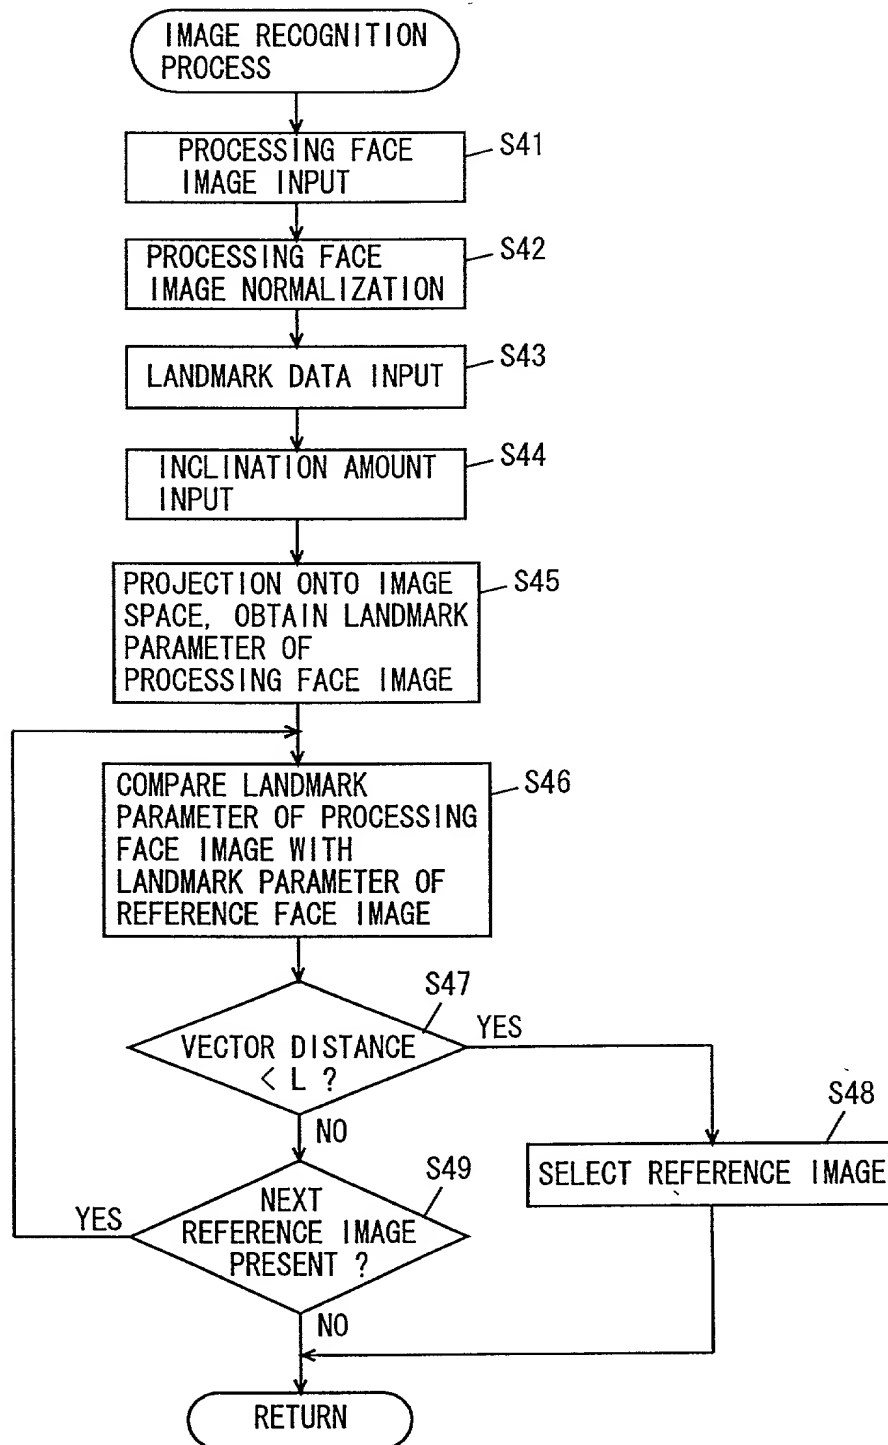

008090" 60768560

Attorney Docket No.

COMBINED DECLARATION/POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor(s), I(we) hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled IMAGE PROCESSING APPARATUS, IMAGE PROCESSING METHOD, AND RECORDING

MEDIUM RECORDED WITH IMAGE PROCESSING PROGRAM TO PROCESS IMAGE TAKING INTO CONSIDERATION the specification of which
DIFFERENCE IN IMAGE PICKUP CONDITION USING AAM

(check one) X is attached hereto.

_____ was filed on _____ as
United States Application No. _____

_____ PCT International Patent Application Number _____
 filed _____
 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed
------------------------------	------------------

<u>11-168690(P)</u>	<u>Japan</u>	<u>15/June/1999</u>
(Number)	(Country)	(Day/Month/Year Filed)

 X Yes No

(Number)	(Country)	(Day/Month/Year Filed)
1	USA	10/10/2019
2	USA	10/10/2019
3	USA	10/10/2019
4	USA	10/10/2019
5	USA	10/10/2019
6	USA	10/10/2019
7	USA	10/10/2019
8	USA	10/10/2019
9	USA	10/10/2019
10	USA	10/10/2019
11	USA	10/10/2019
12	USA	10/10/2019
13	USA	10/10/2019
14	USA	10/10/2019
15	USA	10/10/2019
16	USA	10/10/2019
17	USA	10/10/2019
18	USA	10/10/2019
19	USA	10/10/2019
20	USA	10/10/2019
21	USA	10/10/2019
22	USA	10/10/2019
23	USA	10/10/2019
24	USA	10/10/2019
25	USA	10/10/2019
26	USA	10/10/2019
27	USA	10/10/2019
28	USA	10/10/2019
29	USA	10/10/2019
30	USA	10/10/2019
31	USA	10/10/2019
32	USA	10/10/2019
33	USA	10/10/2019
34	USA	10/10/2019
35	USA	10/10/2019
36	USA	10/10/2019
37	USA	10/10/2019
38	USA	10/10/2019
39	USA	10/10/2019
40	USA	10/10/2019
41	USA	10/10/2019
42	USA	10/10/2019
43	USA	10/10/2019
44	USA	10/10/2019
45	USA	10/10/2019
46	USA	10/10/2019
47	USA	10/10/2019
48	USA	10/10/2019
49	USA	10/10/2019
50	USA	10/10/2019
51	USA	10/10/2019
52	USA	10/10/2019
53	USA	10/10/2019
54	USA	10/10/2019
55	USA	10/10/2019
56	USA	10/10/2019
57	USA	10/10/2019
58	USA	10/10/2019
59	USA	10/10/2019
60	USA	10/10/2019
61	USA	10/10/2019
62	USA	10/10/2019
63	USA	10/10/2019
64	USA	10/10/2019
65	USA	10/10/2019
66	USA	10/10/2019
67	USA	10/10/2019
68	USA	10/10/2019
69	USA	10/10/2019
70	USA	10/10/2019
71	USA	10/10/2019
72	USA	10/10/2019
73	USA	10/10/2019
74	USA	10/10/2019
75	USA	10/10/2019
76	USA	10/10/2019
77	USA	10/10/2019
78	USA	10/10/2019
79	USA	10/10/2019
80	USA	10/10/2019
81	USA	10/10/2019
82	USA	10/10/2019
83	USA	10/10/2019
84	USA	10/10/2019
85	USA	10/10/2019
86	USA	10/10/2019
87	USA	10/10/2019
88	USA	10/10/2019
89	USA	10/10/2019
90	USA	10/10/2019
91	USA	10/10/2019
92	USA	10/10/2019
93	USA	10/10/2019
94	USA	10/10/2019
95	USA	10/10/2019
96	USA	10/10/2019
97	USA	10/10/2019
98	USA	10/10/2019
99	USA	10/10/2019
100	USA	10/10/2019

___ Yes ___ No

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Appln. Serial No.)

(Filing Date)

(Status-patented, pending, abandoned)

(Appln. Serial No.)

(Filing Date)

(Status-patented, pending, abandoned)

[illegible]

I hereby appoint as my attorneys, with full power of substitution and revocation, to prosecute the patent application identified above and to transact all business in the U.S. Patent and Trademark Office connected therewith: Edward A. Becker, Reg. No. 37,777; Stephen A. Becker, Reg. No. 26,527; Marcel K. Bingham, Reg. No. 42,327; John G. Bisbikis, Reg. No. 37,095; Daniel Bucca, Reg. No. 42,368; Kenneth L. Cage, Reg. No. 26,151; Stephen C. Carlson, Reg. No. 39,929; Tom A. Corrado, Reg. No. 42,439; Paul Devinsky, Reg. No. 28,553; Laura A. Donnelly, Reg. No. 38,435; Margaret M. Duncan, Reg. No. 30,879; Brian E. Ferguson, Reg. No. 36,801; Michael F. Fogarty, Reg. No. 36,139; Willem F. Gadiano, Reg. No. 37,136; Keith E. George, Reg. No. 34,111; John A. Hankins, Reg. No. 32,029; Brian D. Hickman, Reg. No. 35,894; Eric J. Kraus, Reg. No. 36,190; Patrick B. Law, Reg. No. 41,549; Robert E. LeBlanc, Reg. No. 17,219; Jack Q. Lever, Reg. No. 28,149; Raphael V. Lupo, Reg. No. 28,363; Christine F. Martin, Reg. No. 39,762; Michael A. Messina, Reg. No. 33,424; Eugene J. Molinelli, Reg. No. 42,901; Christopher J. Palermo, Reg. No. 42,056; Joseph H. Paquin, Jr., Reg. No. 31,647; Robert L. Price, Reg. No. 22,685; Gene Z. Robinson, Reg. No. 33,351; Joy Ann G. Serauskas, Reg. No. 27,952; David A. Spenard, Reg. No. 37,449; Arthur J. Steiner, Reg. No. 26,106; David L. Stewart, Reg. No. 37,578; Michael D. Switzer, Reg. No. 39,552; Leonid D. Thenor, Reg. No. 39,397; Keith J. Townsend, Reg. No. 40,358; Aaron Weisstuch, Reg. No. P41,557; Edward J. Wise, Reg. No. 34,523; Alexander V. Yampolsky, Reg. No. 36,324; and Robert W. Zelnick, Reg. No. 36,976 all of

Please address all correspondence and telephone calls to:

MCDERMOTT, WILL & EMERY
600 13th Street, N.W.
WASHINGTON, D.C. 20005-3096
Telephone: 202-756-8000

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Yuusuke NAKANO

Inventor's signature Yuusuke Nakano Date May 31, 2000
Residence Akashi-Shi, Hyogo-Ken, Japan Citizenship Japanese
Post Office Address C/O MINOLTA CO., LTD., Osaka Kokusai Building, 3-13, 2-Chome,
Azuchi-Machi, Chuo-Ku, Osaka-Shi, Osaka, 541-8556, Japan